
Profi Liner ULTRA

Type: SDP 27 eLUB-CS

Profi Liner Ultra in sliding roof design

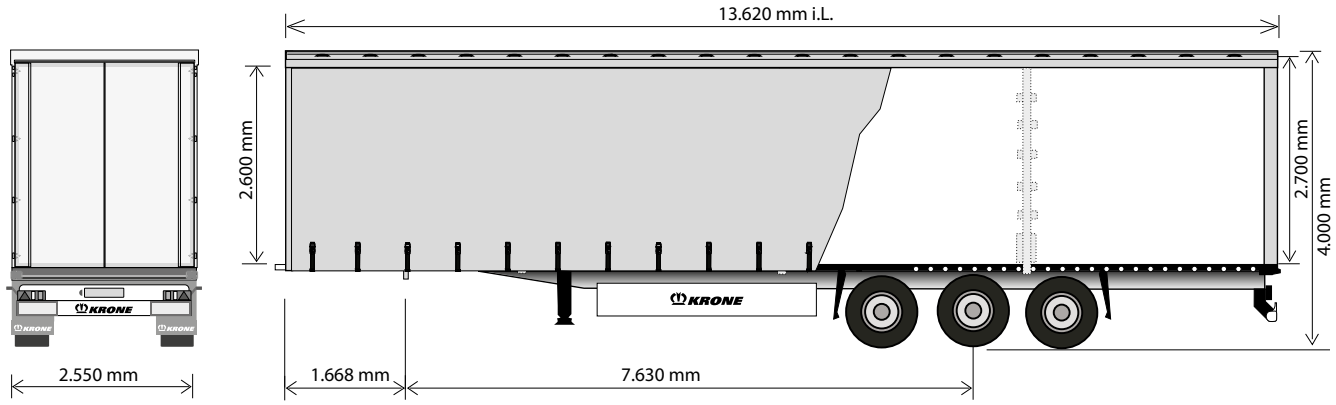

Technical data:

Type:	SDP 27 eLUB-CS
King pin load:	12,000 kg
Axle load (technically possible):	24,000 kg
Allowable gross weight (technically possible):	36,000 kg
Tare weight:	approx. 5,630 kg
Payload (technically possible):	approx. 30,370 kg
Axle spread:	1,310 / 1,310 mm
Neck height:	125 mm
5th wheel height:	1,030 - 1,250 mm
Side access length:	13,620 mm
Side access height:	2,000 – 2,800 mm
Side acces width:	2,480 mm
Turning radius:	2,040 mm

(Dimensions and weights for standard units)

Are you already familiar with Krone's services?



SPARE PARTS TELEMATICS FAIR CARE MOBILITY SERVICE LOCATOR

Find out more about:
www.krone-trailer.com/english/service

Technical description:

Multi Lock side rave including load securing positions every 100 mm	Alloy cant rail, continuous, for support of sliding curtain and posts, KRONE sliding roof, Roof also movable to the front and rear, Roof reinforcement by steel wire ropes for load safety certificate; 4 sets of wooden planks
ALU-LEG falling support leg, LT 650.700	Alloy Front wall with solid corner posts; lateral restricted through loading; Front wall reinforced with plywood inner skin; quick release for side curtains on front wall; retainer for curtain cord
Low-maintenance axles (SAF Intradisc plus integral) with air suspension and disc brakes (430 mm), offset 120; raise/lower valve incl. auto reset valve	Alloy container rear doors including bolted steel frame, integrated double door looks and concealed door hinges; roof header hinged and movable; clamping device for tarpaulin with ratchet at the rear frame
Tyres: 6 x 385/65 R 22.5, brand: Krone choice, mounted on alloy rims, polished, brand: Alcoa, type: Dura Bright	3 pairs of side posts, symmetrical, plank pockets for posts
Wheel covering according to EC-regulations; Spray suppression according to EC-guidelines	Delta shaped rubber profiles at rear; delta steel buffers at rear; load security certificate according EN 12642 Code XL
Spare wheel carrier as an option	1 PVC curtain with full lengths vertical reinforcements, top with rollers for sliding curtains, bottom with tensioners, curtain tensioner out of stainless steel; roof tarpaulin in white
Brake system according to ECE R 13, including vehicle stabilising system; spring parking brake; 2S/2M EBS system, 2 sensors on one axle with RSS, diagnostics by ISO 7638 socket (EBS); aluminium air tank	Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; under-run protection and light panel coated white for safety reasons; wheels silver with high-quality paint finish; reflective outline marking according to ECE-R48
Lights according to UN ECE reg. no. 48; 24 volts lighting system with 2 x 7-pin socket DIN ISO 1185/3731; front and rear marker lights; two multi-function rear lights incl. rear fog light and reversing lights; contouring lights, number plate lights and side marker lights in LED	
21 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc. to DIN EN 283; for floor loadings up to 5,460 kg stacker-truck axle load	

Fahrzeugwerk Bernard KRONE GmbH & Co. KG
Bernard-Krone-Straße 1, 49757 Werlte, GERMANY
Phone: +49 (0) 5951 209-0, Fax: +49 (0) 5951 209-98-268

Subject to modifications!
VF/Beu issue 03/2020