


Profi Carrier N (2-axle, low)

» Type: AZP 18 eLN4-CS



2 axle drawbar trailer, low construction, in curtainsider design

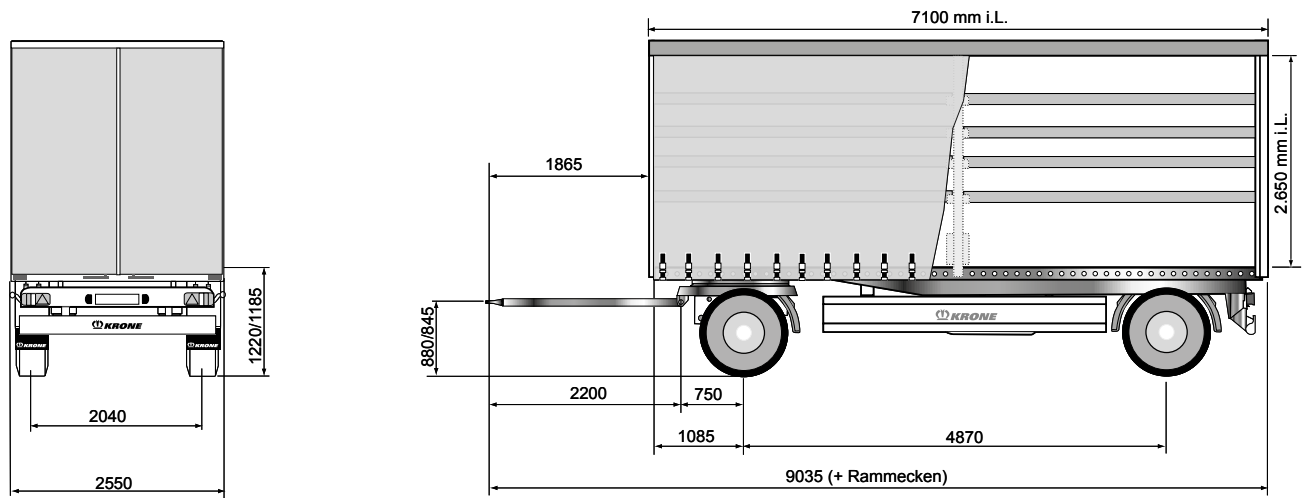

| Technical data | Standard | Option |
|--|-----------------------|----------------|
| Type: | AZP 18 eLN4-CS | AZP 18 eLN4-CS |
| Axle load: | 18,000 kg | 18,000 kg |
| Allowable gross weight: | 18,000 kg | 18,000 kg |
| Tare weight approx.: | 4,330 kg | 4,430 kg |
| Axle spread: | 4,870 mm | 5,070 mm |
| Construction height at front: | 70 mm | 70 mm |
| Chassis height, unloaded (385/65 R 22.5): | 1,220 mm | 1,220 mm |
| Chassis height, unloaded (385/55 R 22.5): | 1,160 mm | 1,160 mm |
| Internal length: | 7,100 mm | 7,300 mm |
| Internal width: | 2,480 mm | 2,480 mm |
| Drawbar length: | 2,200 mm | 2,200 mm |
| Total length (centre draw bar eye), approx.: | 9,035 mm | 9,235 mm |
| Internal height (385/65 R 22.5): | 2,650 mm | 2,650 mm |
| Internal height (385/55 R 22.5): | 2,725 mm | 2,725 mm |

(Dimensions and weights for standard units)

| Technical description: | |
|--|---|
| Multi Lock side rave including load securing positions every 100 mm | Alloy cant rail, continuous, for support of sliding curtain and posts, Edscha sliding roof; diagonal roof spanning; 5 sets of alloy planks |
| Low maintenance steering pivot and draw bar with rubber baring and retaining spring | Front wall with solid corner posts; front wall reinforced with plywood inner skin |
| Low-maintenance axles with air suspension and disc brakes (430 mm); including raise and lower valve, 2 valves | Container rear doors including bolted steel frame, integrated double door looks and concealed door hinges; roof header hinged and movable; clamping device for tarpaulin with ratchet at the rear frame |
| Tyres: 4 x 385/65 R 22.5, brand: Krone choice | 1 pair of side posts, oppositely positioned; plank pockets for posts |
| Spare wheel carrier as an option | Delta shaped rubber profiles at rear; delta steel buffers at rear; load security certificate according EN 12642 Code XL |
| Wheel covering according to EC-regulations; Spray suppression according to EC-guidelines | 1 PVC curtain with full lengths vertical reinforcements, top with rollers for sliding curtains, bottom with tensioners, curtain tensioner out of stainless steel; roof tarpaulin in white |
| Brake system according to EC-regulation 13; with electronic stability system spring parking brake; EBS-braking system, 4S/3M, 4 sensors on 2 axles; Diagnostics by ISO7638 plug connection (EBS supply cable) | Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; under-run protection and light panel coated white for safety reasons; wheels silver with high-quality paint finish; reflective outline marking according to ECE-R48 |
| Lights according to UN ECE reg. no. 48; 24 volts lighting system with 2 x 7-pin socket DIN ISO 1185/3731; front and rear marker lights; two multi-function rear lights incl. rear fog light and reversing lights; contouring lights, number plate lights and side marker lights in LED | |
| 30 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc. to DIN EN 283; for floor loadings up to 5,460 kg stacker-truck axle load | |

