
Paper Liner Ultra

Type: SDP 27 eLBP4-CS





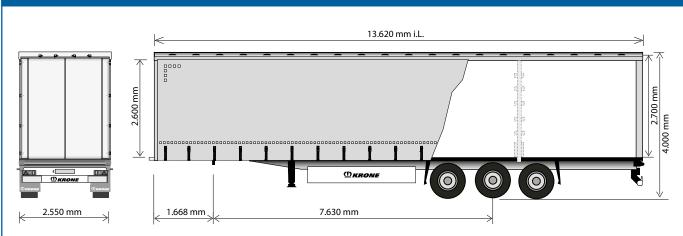

Technical data:

Туре:	SDP 27 eLUBP-CS
King pin load:	12,000 kg
Axle load (technically possible):	27,000 kg
Allowable gross weight (technically possible):	39,000 kg
Tare weight:	approx. 5,960 kg
Payload (technically possible):	approx. 33,040 kg
Axle spread:	1,310 / 1,310 mm
Neck height:	125 mm
5th wheel height:	1,030 - 1,250 mm
Side access length:	13,620 mm
Side access height:	2,480 mm
Side acces width:	2,000 - 2,800 mm
Turning radius:	2,040 mm

Are you already familiar with Krone's services?











Find out more about: www.krone-trailer.com/english/service

FAIR CARE

(Dimensions and weights for standard units)

Technical description:		
Multi Lock side rave including load securing positions every 100 mm	Aluminium cant rail, continuous, for support of sliding curtain and posts, Krone-sliding roof, Roof also movable to the front and rear, Roof reinforce- ment by steel wire ropes for load safety certificate; 4 sets of wooden planks	
2 mechanically operated landing legs, 2 \times 12 tonnes capacity, half round with base plate		
Low-maintenance axles with air suspension and disc brakes (430 mm), offset 120; raise/lower valve incl. auto reset valve	Aluminium front wall bolted with solid corner posts; lateral restricted through loading; Front wall reinforced with plywood inner skin; quick release for side curtains on front wall; retainer for curtain cord	
Tyres: 6 x 385/65 R 22.5, brand: Krone choice		
Wheel covering according to EC-regulations; Spray suppression according to EC-guidelines	Aluminium container rear doors including bolted steel frame, integrated double door looks and concealed door hinges; roof header hinged and movable; clamping device for tarpaulin with ratchet at the rear frame	
Spare wheel carrier as an option		
Brake system according to ECE R 13, including vehicle stabilising system; spring parking brake; 2S/2M EBS system, 2 sensors on one axle with RSS, diagnostics by ISO 7638 socket (EBS)	3 pairs of side posts, symmetrical, plank pockets for posts	
	Delta shaped rubber profiles at rear; delta steel buffers at rear; load security	
Lights according to UN ECE reg. no. 48; 24 volts lighting system with 2 x 7-pin	certificate according EN 12642 Code XL	
socket DIN ISO 1185/3731; front and rear marker lights; two multi-function rear lights incl. rear fog light and reversing lights; contouring lights, number plate lights and side marker lights in LED	1 PVC curtain with full lengths vertical reinforcements, top with rollers for sliding curtains, bottom with tensioners, curtain tensioner out of stainless	
Storage box closed with partition wall , approx. 2080x660x3000 mm, suitable for 16 paper chocks and 2 Joloda pallet rollers, opening on both sides		
30 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc. to DIN EN 283; for floor loadings up to 7,000 kg stacker-truck axle load; 4 Joloda running rails, continous over full loading area, recessed in floor; balance profiles made from PVC; 8 load lock rails in longitudinal direction, throughout full length	Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; under- run protection and light panel coated white for safety reasons; wheels silver with high-quality paint finish; reflective outline marking according to ECE-R48	

