



## Dry Box Duoplex Steel

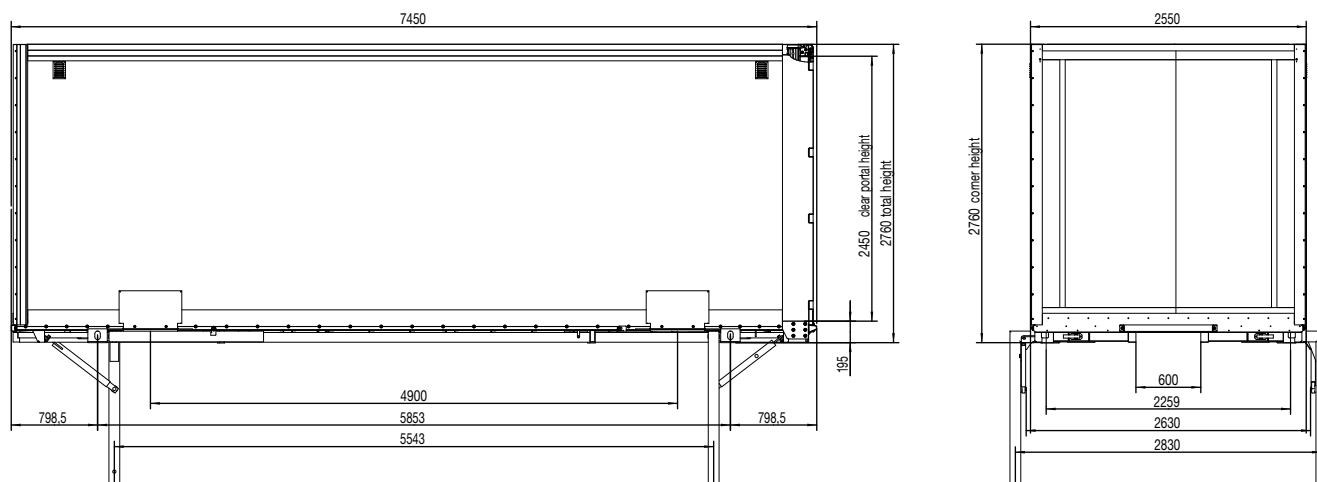

## Rear view with container doors

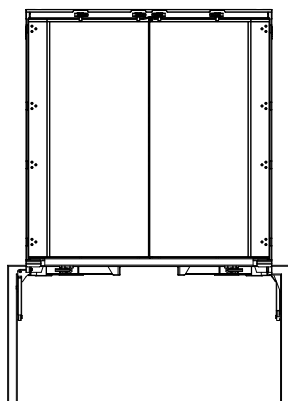

## Technical description

195 mm thick floor group including floor plates; rectangular longitudinal beams and cross members including side rave in welded construction with tunnel. 4 container corner fittings based on 20', symmetrical overhang

4 grappler pockets; Pull out ladder at rear

4 lateral extendable / foldable landing feet, 2-fold locking; Landing leg support

27 mm thick plywood floor, fully waterproofed and sealed, resistance test according to DIN EN 283, for floor loadings up to 5.460 kg forklift axle load

side walls made of panels with foamed PU core with high density, inside and outside with impact resistant metallic surface layers; internal forklift protection on 3 sides, approx. 300 mm high

Twin shelled steel rear door with block foam filling, inside with aluminium door panels; door locking device designed as chain

Steel side guard horizontally fixed at rear profile, left and right side; Customs seal; Customs tag; Load security certificate according to EN 12642 Code XL; Grip hoop for rear access

Steel parts are shot blasted, KTL-primer coated and powder coated; container corner fittings and grappler pockets in contrasting color

Technical data	Serie	Option
Type:	<b>WK 7,3 LI</b>	WK 7,7 LI
Perm. total weight:	<b>16,000 kg</b>	16,000 kg
Tare weight, approx.:	<b>2,710 kg</b>	2,790 kg
Internal length:	<b>7,280 mm</b>	7,630 mm
Internal width:	<b>2,470 mm</b>	2,470 mm
Total length:	<b>7,450 mm</b>	7,820 mm
Height of floor assembly, including floor:	<b>195 mm</b>	195 mm
Internal height:	<b>2,525 mm</b>	2,525 mm
Clear portal height (with container door):	<b>2,450 mm</b>	2,450 mm
Corner height:	<b>2,760 mm</b>	2,760 mm
Landing height:	<b>1,320 mm</b>	1,320 mm

(Dimensions and weights for standard units)