


Dry Box


» Type: WK 7,3 STG Steel cassette side walls (galvanized)



Dry Box with clinched side walls

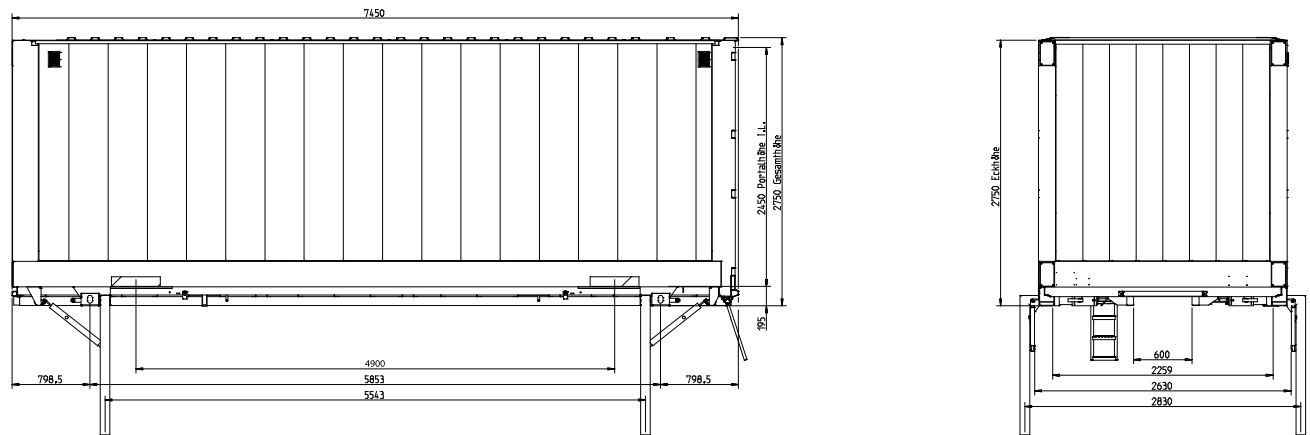

Rear view of container doors

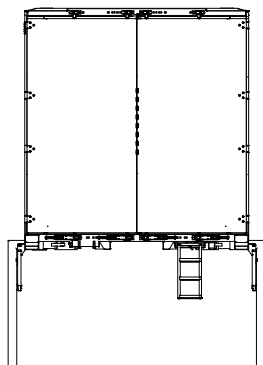

Technical description

195 mm thick floor group including floor plates; rectangular longitudinal beams and cross members including side rave in welded construction with tunnel. 4 container corner fittings based on 20', symmetrical overhang

4 grapple pockets; Pull out ladder at rear

4 lateral extendable / foldable landing feet, 2-fold locking; Landing leg support

27 mm thick plywood floor, fully waterproofed and sealed, resistance test according to EN 283, for floor loadings up to 5.460 kg forklift axle load; 2 ventilation slots at front in the floor (according to GGVS)

Profiled roof with steel trapezium sheets, height: 25 mm

Front wall smooth with steel cassettes (galvanized), inside with plywood covering

Steel cassette side walls (galvanized); 2 ventilation vents on each side wall; Side wall inner with full key hole profiles; internal forklift protection on 3 sides, approx. 360 mm high

Rear wall designed as container rear door with replaceable door sealing; double door locks located inside; door locking device designed as chain

Steel side guard horizontally fixed at rear profile, left and right side; Customs seal; Customs tag; Grip hoop for rear access

Steel parts are shot blasted, KTL-primer coated and powder coated; container corner fittings and grapple pockets in contrasting color

Technical data	Standard	Option
Type:	WK 7,3 STG	WK 7,7 STG
Perm. total weight:	16,000 kg	16,000 kg
Tare weight, approx.:	2,950 kg	3,050 kg
Internal length:	7,300 mm	7,670 mm
Internal width:	2,470 mm	2,470 mm
Total length:	7,450 mm	7,820 mm
Height of floor assembly, including floor:	195 mm	195 mm
Internal height:	2,525 mm	2,525 mm
Clear portal height (with container door):	2,450 mm	2,450 mm
Corner height:	2,750 mm	2,750 mm
Landing height:	1,320 mm	1,320 mm

(Dimensions and weights for standard units)



Fahrzeugwerk Bernard KRONE GmbH & Co. KG
Bernard-Krone-Straße 1, 49757 Werlte, GERMANY
Phone: +49 (0) 5951 209-0, Fax: +49 (0) 5951 209-98-268

Subject to modifications!
VF/Beu issue 02/2018