


Dry Box


» Type: WK 7,3 STP Smooth side walls made of plywood



Dry Box with plywood side walls

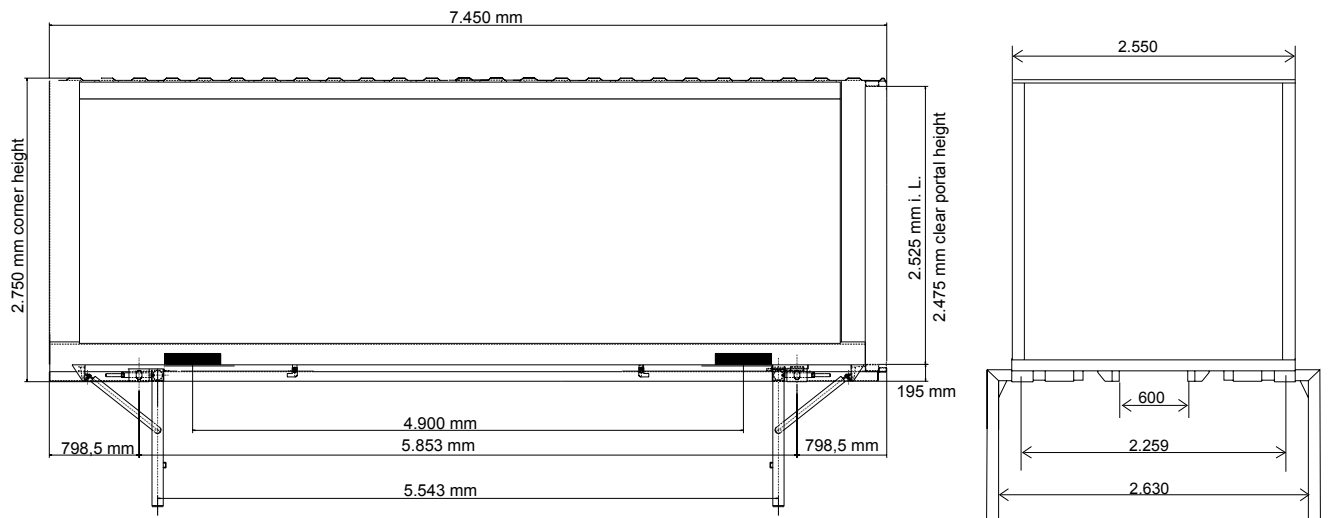

Rear view of container doors

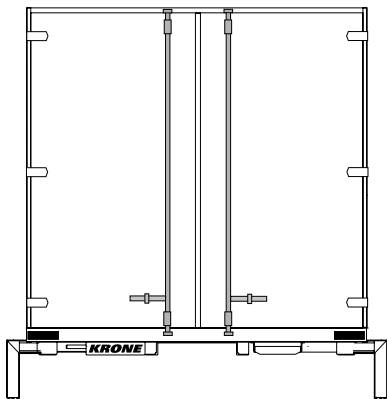

Technical description

195 mm thick floor group including floor plates; rectangular longitudinal beams and cross members including side rave in welded construction with tunnel. 4 container corner fittings based on 20', symmetrical overhang

4 grappler pockets; Pull out ladder at rear

4 lateral extendable / foldable landing feet, 2-fold locking; Landing leg support

27 mm thick plywood floor, fully waterproofed and sealed, resistance test according to EN 283, for floor loadings up to 5.460 kg forklift axle load; 2 ventilation slots at front in the floor (according to GGVS)

profiled roof with steel trapezium sheets, height: 25 mm

front wall smooth made of plywood

Side walls made of plywood; 2 ventilation vents in each side wall; internal forklift protection on 3 sides, approx. 360 mm high;

Rear wall designed as container rear door with replaceable door sealing; Door locks locate outside; Door locking device designed as chain

Steel side guard horizontally fixed at rear profile, left and right side; Customs seal; Customs tag; Grip hoop for rear access; load security certificate according to EN 12642 Code XL

Steel parts are shot blasted, KTL-primer coated and powder coated; container corner fittings and grappler pockets in contrasting color

Technical data	Standard	Option
Type:	WK 7,3 STP	WK 7,7 STP
Perm. total weight:	16.000 kg	16.000 kg
Tare weight, approx.:	2.800 kg	2.900 kg
Internal length:	7.300 mm	7.670 mm
Internal width:	2.470 mm	2.470 mm
Total length:	7.450 mm	7.820 mm
Height of floor assembly, including floor:	195 mm	195 mm
Internal height:	2.525 mm	2.525 mm
Clear portal height (with container door):	2.475 mm	2.475 mm
Corner height:	2.750 mm	2.750 mm
Landing height:	1.320 mm	1.320 mm

(Dimensions and weights for standard units)



Fahrzeugwerk Bernard KRONE GmbH & Co. KG
Bernard-Krone-Straße 1, 49757 Werlte, GERMANY
Phone: +49 (0) 5951 209-0, Fax: +49 (0) 5951 209-98-268

Subject to modifications!
VF/Beu issue 11/2018