


Dry Box

» Type: WK 7,3 ST


Side walls made out of trapezium shaped steel plates



Dry Box with trapezium shape steel plates

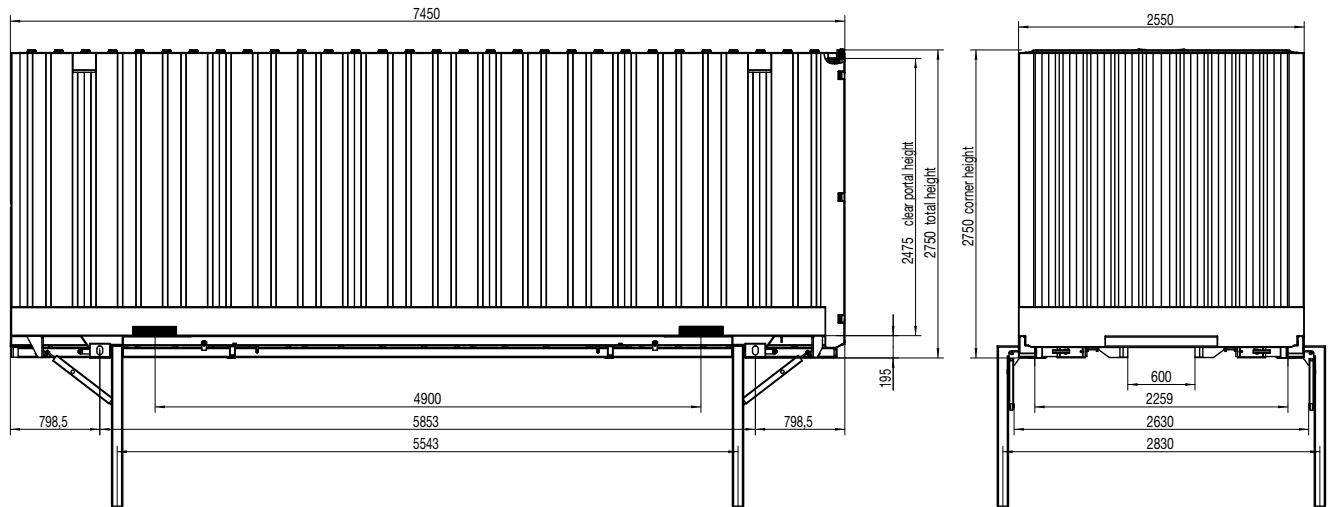

Rear view of container doors

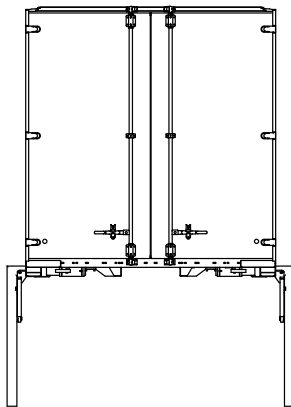

Technical description:

195 mm thick floor group including floor plates; rectangular longitudinal beams and cross members including side rave in welded construction with tunnel. 4 container corner fittings based on 20', symmetrical overhang

4 grappler pockets; Pull out ladder at rear

4 lateral extendable / foldable landing feet, 2-fold locking; Landing leg support

27 mm thick plywood floor, fully waterproofed and sealed, resistance test according to EN 283, for floor loadings up to 5.460 kg forklift axle load; 2 ventilation slots at front in the floor

profiled roof with steel trapezium sheets, height: 25 mm

front wall with 9 mm thick screen printing plate on inner, height: approx. 750 mm

side walls made out of trapezium shaped steel plates; 2 ventilation vents in each side wall; internal forklift protection on 3 sides, approx. 260 mm high;

Rear wall designed as container rear door with replaceable door sealing; Door locks located outside; Door locking device designed as chain

Steel side guard horizontally fixed at rear profile, left and right side; Customs seal; Customs tag; Grip hoop for rear access; load security certificate according to EN 12642 Code XL

Steel parts are shot blasted, KTL-primer coated and powder coated; container corner fittings and grappler pockets in contrasting color

Technical data	Standard	Option
Type:	WK 7,3 ST	WK 7,7 ST
Perm. total weight:	16,000 kg	16,000 kg
Tare weight, approx.:	2,640 kg	2,750 kg
Internal length:	7,300 mm	7,670 mm
Internal width:	2,470 mm	2,470 mm
Total length:	7,450 mm	7,820 mm
Height of floor assembly, including floor:	195 mm	195 mm
Internal height:	2,525 mm	2,525 mm
Clear portal height (with container door):	2,475 mm	2,475 mm
Corner height:	2,750 mm	2,750 mm
Landing height:	1,320 mm	1,320 mm

(Dimensions and weights for standard units)

